

OTDR Report (1310 nm (9 μm))

General Information

File name:	24_1310.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	4:23 PM	Fiber ID:	24
Cable ID:	FAR5 to SS6A (C) A (B-A)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	SS6A	FAR5
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	1.1474 km	Average loss:	0.718 dB/km	Injection level:	25.4 dB
Span loss:	0.823 dB	Average splice loss:	---		
Span ORL:	39.45 dB	Maximum splice loss:	---		

Graph

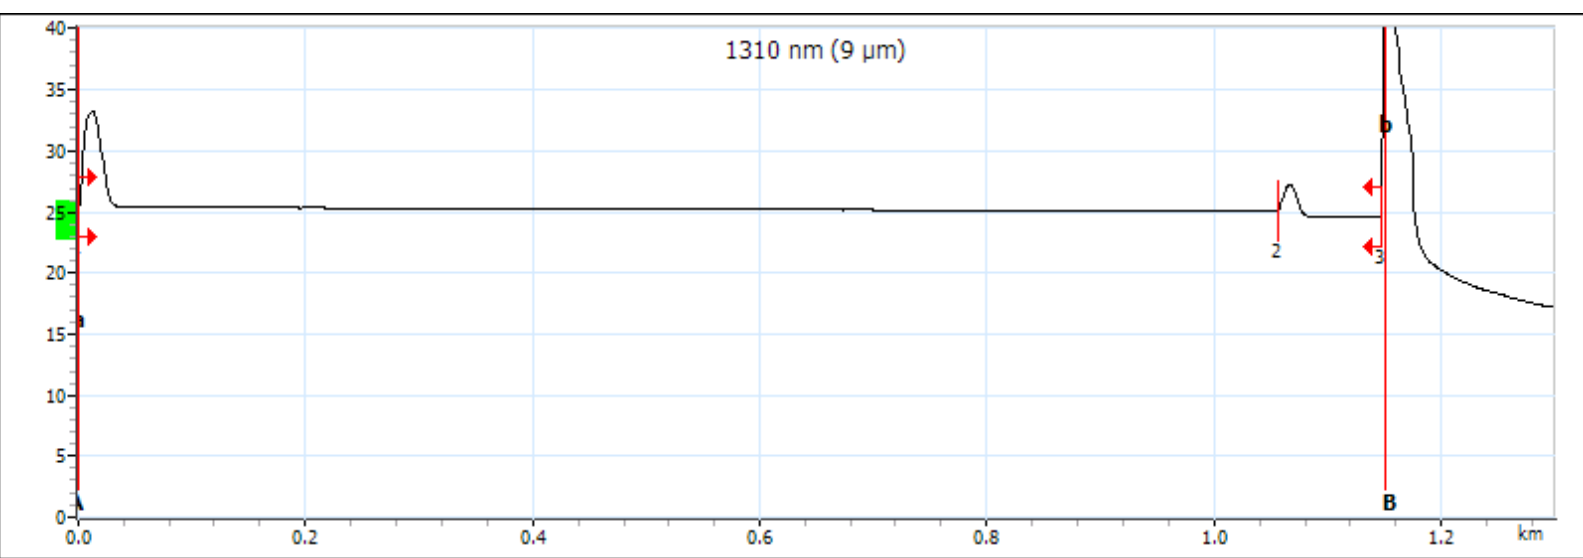

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.880 dB/km	A-B average loss:	-13.863 dB/km
a	0.0000	25.414	A-B LSA loss:	1.012 dB	4-point Event Loss:	-16.348 dB
A	0.0000	25.414	A-B ORL:	37.68 dB	Maximum reflectance:	-41.4 dB
B	1.1502	41.359				
b	1.1502	41.359				

OTDR Report (1310 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-43.7		0.000
Section		1.0567	0.360		0.340	0.360
Reflective	2	1.0567	0.446	-56.8		0.806
Section		0.0906	0.017		0.191	0.823
Reflective	3	1.1474	---	> -23.7		0.823

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1310 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1310 nm (9 μm)
Range (km)	1.3000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.467700		
Backscatter (dB)	-79.45		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		

OTDR Report (1550 nm (9 μm))

General Information

File name:	24_1550.trc	Customer:	ADNOC
Test date:	14-Feb-24	Company:	PAN ARABIA
Test time:	4:23 PM	Fiber ID:	24
Cable ID:	FAR5 to SS6A (C) A (B-A)		
Job ID:	0500831		
Comments:	END TO END TEST		


Locations

	Location A	Location B
Location	SS6A	FAR5
Operator	PANDA	HABEEB
Model	MAX-720C-Q1-EA-EI	
Serial number	1206159	
Calibration date	29-Mar-23 (UTC)	

Results

Span length:	1.1472 km	Average loss:	0.533 dB/km	Injection level:	24.2 dB
Span loss:	0.612 dB	Average splice loss:	---		
Span ORL:	41.65 dB	Maximum splice loss:	---		

Graph

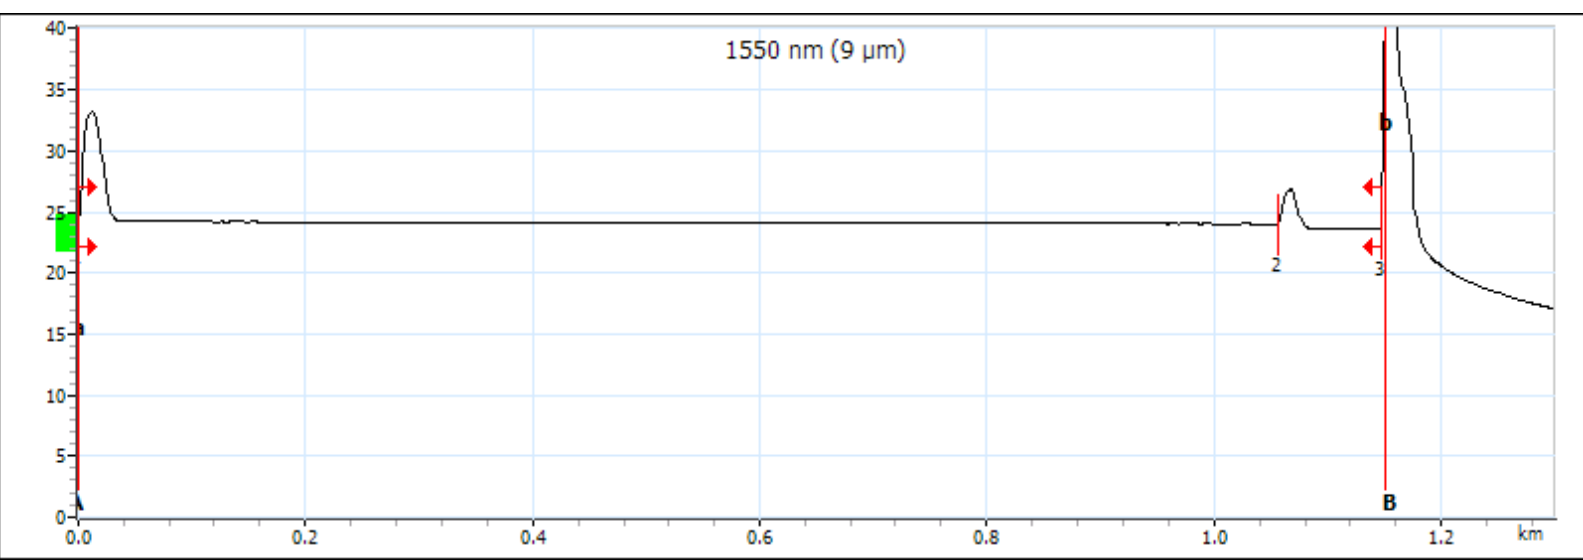

Markers

Marker	Position (km)	Value (dB)	A-B LSA attenuation:	0.772 dB/km	A-B average loss:	-14.626 dB/km
a	0.0000	24.707	A-B LSA loss:	0.888 dB	4-point Event Loss:	-17.053 dB
A	0.0000	24.707	A-B ORL:	<37.56 dB	Maximum reflectance:	> -27.5 dB
B	1.1502	41.530				
b	1.1502	41.530				

OTDR Report (1550 nm (9 μm))

Event Table

Type	No.	Pos./Length (km)	Loss (dB)	Reflectance (dB)	Attenuation (dB/km)	Cumulative (dB)
First Connector	1	0.0000	---	-43.7		0.000
Section		1.0566	0.200		0.189	0.200
Reflective	2	1.0566	0.383	-57.4		0.583
Section		0.0906	0.029		0.319	0.612
Reflective	3	1.1472	---	> -24.1		0.612

Macrobend

Position (km)	Delta Loss (dB)

Pass/Fail Thresholds

	1550 nm (9 μm)

Test Parameters

	A → B
Wavelength (nm)	1550 nm (9 μm)
Range (km)	1.3000
Pulse (ns)	100
Duration (s)	5

Test Settings

	A → B	Macrobend Wavelengths	Macrobend Delta Loss (dB)
IOR	1.468325		
Backscatter (dB)	-81.87		
Helix factor (%)	0.00		
Splice loss detection threshold (dB)	0.020		
Reflectance detection threshold (dB)	-72.0		
End-of-fiber detection threshold (dB)	5.000		